




TID815

OPERATION MANUAL
CALLER ID PHONE

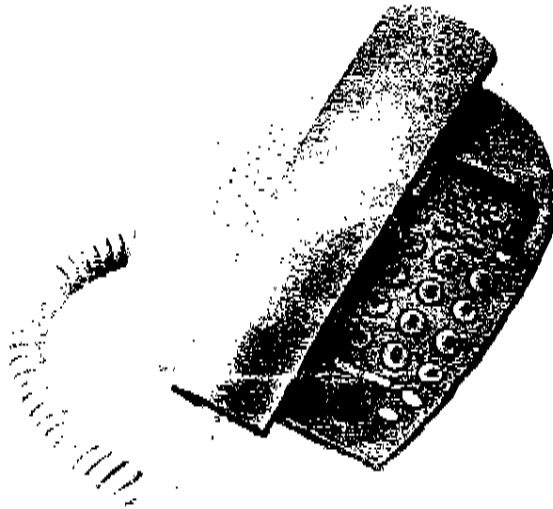


Please read carefully before operating this unit.

FEATURE LIST:

- ※ FSK System Caller ID Telephone.
- ※ Store 99 Call Memories with Caller Name. (15 bit number. 15 bit name)
- ※ Store 10 two-touch memory speed dialing.
- ※ Receiver Volume HI/LOW Selector.
- ※ LCD Capable of Displaying Incoming Call Number, Date and Time.
- ※ Real Time / Date and Dialing Number / Talking Time Display.
- ※ Tone/Pulse dialing mode selector.
- ※ Flash and Last Number Redial Function.
- ※ Review Caller ID List to Dial Back.
- ※ Setup Local Area Code.
- ※ 8-grade LCD Brightness Can be Adjust.
- ※ English, Portuguese, Spanish 3 Language Select. (Optional)
- ※ Dot Matrix LCD Display with 15 Digit Calls, New Calls and Calls Number.
- ※ Total Call \ New Call & Call Message Mailbox Display.

LOCATION OF CONTROLS:

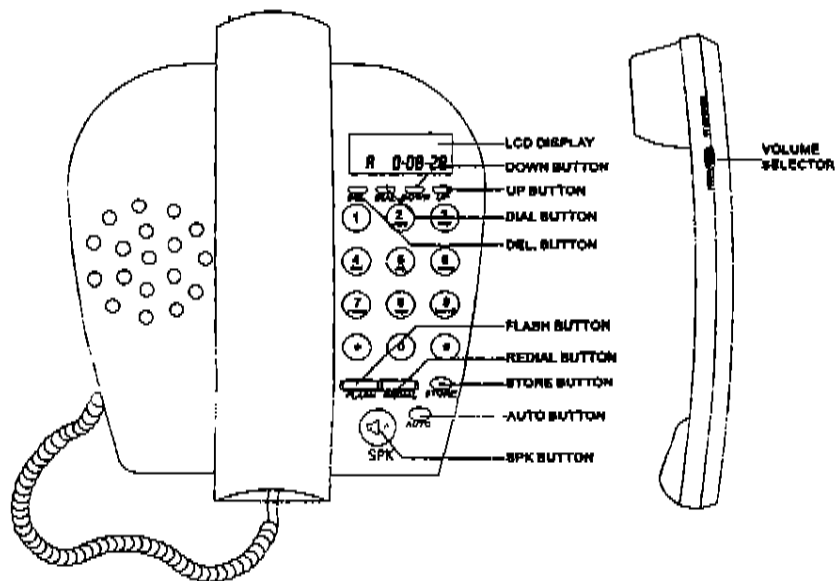

INSTALLATION

1. Open the cover of the battery compartment install 3 "AAA" 1.5v batteries.
2. Connect the coiled cord to handset and the telephone base.
3. Connect the telephone wire to the telephone set and wall jack.

BASIC PHONE FEATURES

Set language, local area code, date, time, LCD contrast

1. In the on-hook status, press "DOWN" and "DEL.", and the LCD will display "SET LANGUAGE". Press "UP" and "DOWN" to select the desired language, then press DEL. to confirm.
2. Next the LCD will display "SET AREA CODE", press "UP" and "DOWN" to set the value of the first digit and press "DEL." to confirm. Repeat the above operation to set the value of the second and third digits.
3. Next the LCD will display "SET TIME/DATE". Press "UP" and "DOWN" to set the desired hour and press "DEL." to confirm. Repeat the same operation to set minute and date.
4. Next LCD will displays "LCD CONTRAST", press "UP" and "DOWN" to set the desired contrast level and press "DEL." to confirm.

T/P Dialing Selector

You can choose the type of dialing by selecting TONE/PULSE mode.

Receiving a call

1. Pick up the handset or press the "SPK" when the phone rings. The LCD will display the talking time.
2. When you finish the phone call, hang up the handset back or press "SPK" button once again.

Making a calls

Method 1. Normal dialing

1. Pick up the handset or press "SPK" button to hear a dialing tone.
2. Dial the number you want to call.
3. Hang up the handset or press "SPK" button again if you use hands-free conversation

Method 2 Pre-Dialing (On-Hook Dialing)

1. In the on-hook mode, dial the number you want to call, and you can delete any wrong number by the press "DEL." button.
2. Pick up the handset or press "SPK" button, the number shows on the LCD will automatic dialing out.

Last number redial

Pick up the handset or press "SPK", and press "REDIAL" when you hear the dialing tone.

Flash Function

The "FLASH" button replaces the hook switch when using features such as call waiting and call forwarding.

Storing Telephone Numbers

1. Press "STORE" and the LCD will display "STORED NUMBER".
2. Dial the number you want to store.
3. Press "STORE" one more time.
4. The LCD will display "STORE TO---?", press one of dialing button 0-9 buttons for memory location.

5. Now the phone number is stored and the whole process is completed.
6. Repeat the above procedures to store other phone numbers.

To Speed Dial from Stored Numbers

1. Pick up the handset or press "SPK" button and hear the dial tone.
2. Press "AUTO" once and then press one of the buttons from the 0-9. The phone number will be dialed automatically from the memory.

CALLER ID FEATURES

To Review Incoming Calls

Press "UP" and "DOWN" to review incoming calls.

Incoming calls will be stored in the order they were received.

When all the incoming calls have been reviewed, the incoming call indicator will stop flashing.

To Call Back from Caller ID List

1. When on hook, press "UP" and "DOWN" to review all the memorized incoming calls. Select the number you want to call back.
2. When the number you want to call back is displayed on the LCD press "DIAL". The LCD will display "PICKUP OR ADJ." (Pick up or adjust). If the selected number is a local call, pick up the receiver and the current number will be dialed automatically.
3. In case the phone number is a long-distance number, add "1" (long-distance call code) at the head automatically.

Message Box Indication

A message icon will be displayed on the LCD to remind you that someone has left a message for you.

Your local telephone company will provide this service.

Contact your local telephone company to subscribe to this service.

To Erase One Caller ID Number At A Time

1. Press "UP" and "DOWN" button to review calls you want to erase.
2. Press "DEL." button once to display "DEL CALLS?"
3. Press "DEL." button one more time and the phone number displayed on the LCD will be erased.

To Delete All Data at One Time

1. Press "DEL" and hold down for 3 seconds. LCD will display "DEL ALL CALLS?"
2. Continue to hold down "DEL." button until the LCD displays "NO CALLS"; this confirms that all of the incoming calls have been deleted.
3. If there are any calls that have not been reviewed you will not be able to delete the calls. The LCD will display "NEW MSG PROTECT".